


**72 Tube Rotary Steam Dryer
The Anderson International AN190
Carbon Steel Tubes**


**The Anderson International AN191
Stainless Steel Tubes**

The Anderson 72-Tube Rotary Steam Dryer delivers faster drying at lower cost. Extremely popular due to low air requirement. It is the most efficient equipment for accurately adjusting the moisture content of poultry feathers, coagulated blood, grains, chemicals, minerals and other non-sticky granular materials.


Unique steam tube bundle arrangement allows expansion and contraction and reduced danger of leaks or strains. Electrical H.P. 5. Approximate shipping weights with motor drive — domestic 12,640 lbs., export 14,940 lbs. Cubic feet 440.

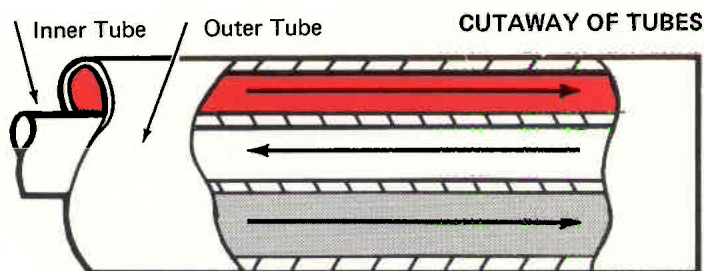


**END ELEVATION
SHOWING
ARRANGEMENT
OF TUBES**

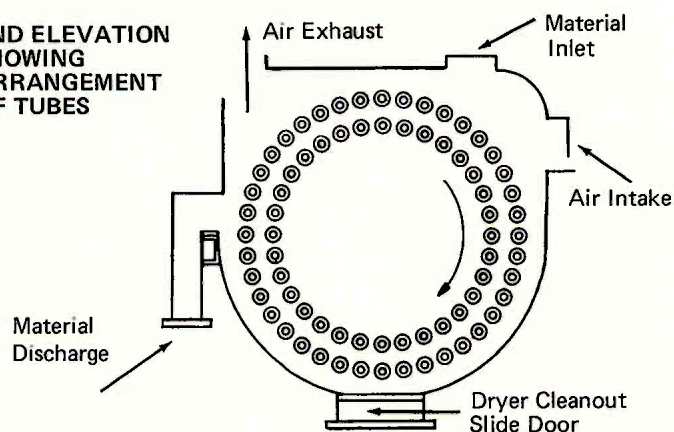

Front Elevation Showing Steam Flow

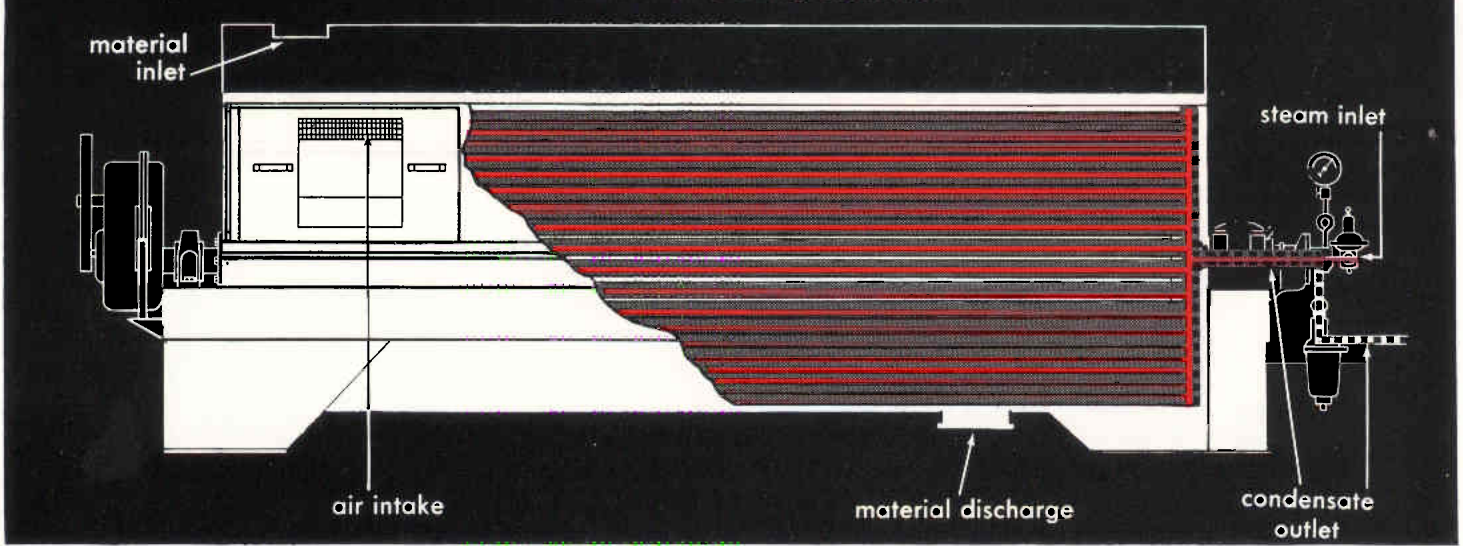

Typical Materials	Moisture		Finished Product
	From	To	
Corn Germ	12%	3%	1800 — 2000# per hr.
Blood Meal	45-50%	8%	1000 — 1500# per hr.
Cracked Corn	26%	12%	6750 — 7280# per hr.
Poultry Feathers	35-45%	8%	1000 — 1500# per hr.
Sesame Seed	10%	3%	1800 — 2000# per hr.
Soybeans (cracked)	12%	3%	1500 — 1750# per hr.
Whole Flaxseed	10%	3%	1800 — 2000# per hr.

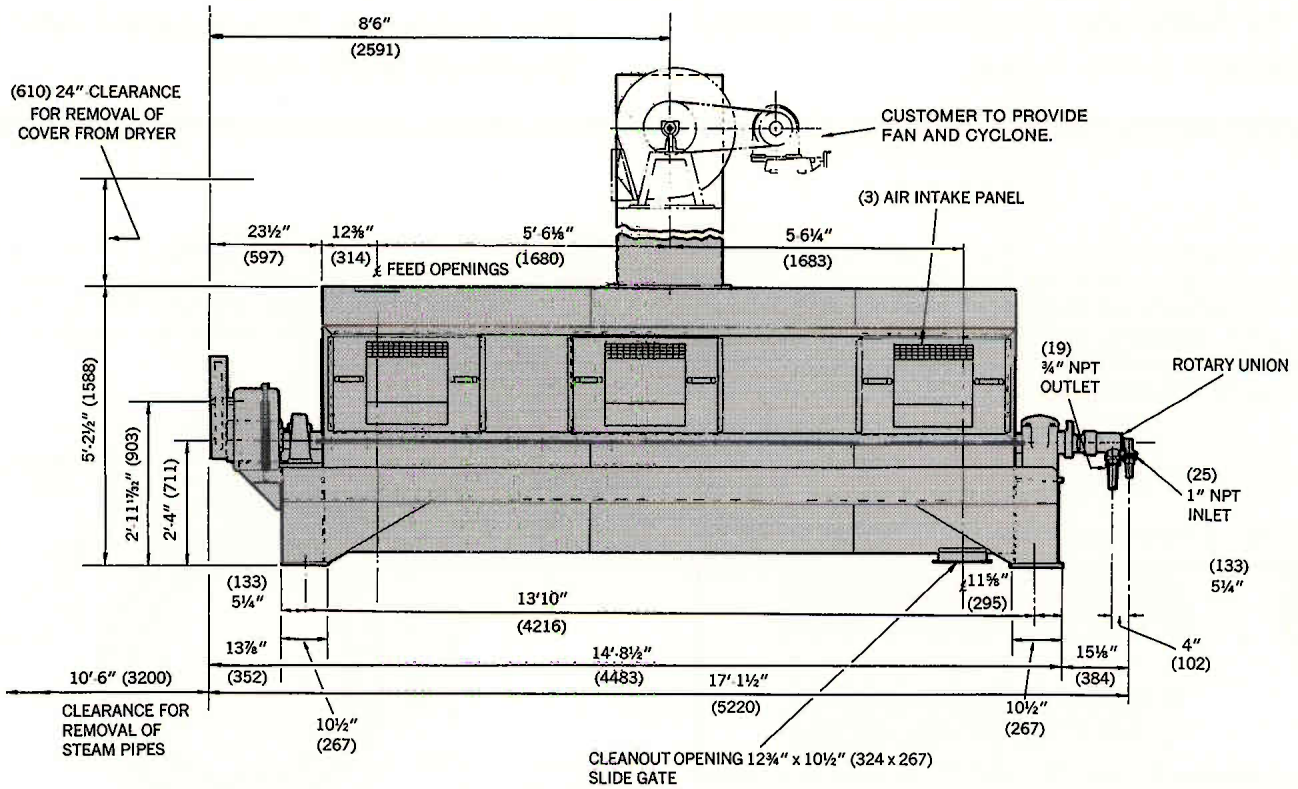

TOTAL EMPTY WEIGHT = 11,100 LBS. = 5,035 KG.
 TOTAL WEIGHT WHEN FILLED WITH WATER
 = 16,200 LBS. = 7350 KG.

NOTE:
 DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS

FLOOR SPACE:
 LENGTH 17'-1-1/2"
 WIDTH 4'-11-1/8"
 HEIGHT 5'-2-1/2"

Anderson International Corp®, 6200 Harvard Avenue, Cleveland, Ohio 44105 • Phone: (216) 641-1112 • Telex: 98-0259